

Rockfon Color-all™

Colour is all up to you now!

activeceilings®

ROCKWOOL
Rockfon®
ACTIVATE YOUR CEILING

Rockfon Color-all™

Colour is all up to you now!

When creating a desired atmosphere, the use of colour increases design flexibility. The Rockfon Color-all range comprises 34 exclusive colours, from subtle to bold, arranged within six themes:

- City Tones
- Natural Tones
- Sensorial Tones
- Energetic Tones
- Precious Tones
- Sophisticated Tones







The use of new technology and manufacturing techniques has resulted in long lasting and highly homogeneous colours. The Rockfon Color-all surface has an improved smoothness and mat gloss giving colours their true expression.

The 34 colours are available with lay-in, semi-concealed or concealed edges in a large variety of dimensions giving total design freedom.

Rockfon Color-all combines very high sound absorption ($\alpha_w = 0.95-1.00$), high fire performance (A1 and A2-s1,d0) and resists up to 100% relative humidity (RH) without bending thereby ensuring longevity.

Rockfon Color-all ceiling panels are 100% recyclable.

ASSORTMENT

Edge detail	Module size (mm)	Weight (kg/m ²)	MS* easy access (mm)	Installation system
 A15	600 x 600 x 15	2.2	100	System SY15
	610 x 610 x 15	2.2	100	
	600 x 600 x 20	2.4	100	
 A24	600 x 600 x 15	2.2	100	System SY24
	610 x 610 x 15	2.2	100	
	1200 x 600 x 15	2.2	100	
	600 x 600 x 20	2.4	100	
	1200 x 600 x 20	2.4	100	
 D	600 x 600 x 20	3.4	60	System D
 E15	600 x 600 x 20	3.4	100	System SY15
 E24	600 x 600 x 20	3.4	100	System SY24
 X	600 x 600 x 22	3.7	62	System SY24

* MS - Minimum Suspension


For minimum quantities and lead times, please contact Rockfon representatives.





SOUND ABSORPTION

Sound absorption has been measured in accordance with ISO 354. Sound absorption data α_p , α_w and absorption class are calculated in accordance with ISO 11654. Noise Reduction Coefficient (NRC) is calculated in accordance with ASTM C423.

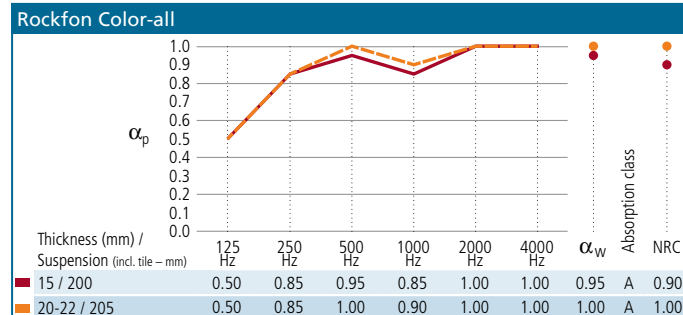

FIRE PERFORMANCE

General: Rockfon products have a core of stone wool. Stone wool is non-combustible with a melting point of more than 1000°C.

Reaction to fire: Rockfon Color-all: Class A1 in accordance with EN 13501-1. Rockfon Color-all Precious Tones: Class A2-s1,d0 in accordance with EN 13501-1.

Fire protection: The fire resistant properties of stone wool ensure Rockfon ceiling tiles provide fire protection in construction. The fire protection properties of Rockfon ceilings have been tested and classified against European norm EN 13501-2 and/or national norms depending on requirements in national building codes.



HUMIDITY RESISTANCE AND DIMENSIONAL STABILITY (FLEXURAL TENSILE STRENGTH)

Rockfon products are dimensionally stable even at humidity levels of up to 100% RH and can be installed at all temperatures ranging from 0°C to 40°C. No acclimatisation is necessary.

Rockfon Color-all is predominantly classified as class 1/C/0N in accordance with EN 13964. However, certain module sizes (width above 700 mm) are class 2/C/0N.

Rockfon Color-all may be installed in well-ventilated swimming pools areas, provided that condensation cannot occur on the suspended ceiling system and that it is out of splashing range.



LIGHT REFLECTION

The percentage of light reflection depends on the colour (see information on the following pages). It has been measured in accordance with ISO 7724-2.



HYGIENE

Stone wool has no nutritional value and therefore it provides no sustenance to harmful micro-organisms.



CLEANING

The surface can be vacuum cleaned with a soft brush attachment.



ENVIRONMENT


A representative selection of Rockfon products have been awarded the Danish Indoor Climate Label and the Finnish Indoor Climate Label (M1).

Rockfon Color-all is recyclable.


Rockfon Color-all™

CITYTONES


STONE - 01
NCS S 1500-N
Light reflection: 55%



PLASTER - 02
NCS S 1005-R80B
Light reflection: 58%



GRAVEL - 03
NCS S 3502-B
Light reflection: 34%




MASTIC - 04
NCS S 3500-N
Light reflection: 33%




ZINC - 05
NCS S 4005-R50B
Light reflection: 33%



CONCRETE - 06
NCS S 6500-N
Light reflection: 16%




TARMAC - 07
NCS S 6005-R20B
Light reflection: 13%




Natural
tones

ANTHRACITE - 08
NCS S 7010-R90B
Light reflection: 7%



CHARCOAL - 09
NCS S 9000-N
Light reflection: 4%




STUCCO - 20
NCS S 0505-Y40R
Light reflection: 70%




CHALK - 21
NCS S 2005-Y40R
Light reflection: 51%



LINEN - 22
NCS S 4005-Y50R
Light reflection: 29%




HEMP - 23
NCS S 3005-Y20R
Light reflection: 45%




CORK - 24
NCS S 4010-Y30R
Light reflection: 30%




EARTH - 25
NCS S 5010-Y50R
Light reflection: 22%



CLAY - 26
NCS S 4502-Y
Light reflection: 22%




HUMUS - 27
NCS S 8010-Y70R
Light reflection: 5%




NCS codes are closest colour match. The actual colour of the ceiling tiles may deviate slightly from printed colours due to the texture of the surface and the underlying colour of stone wool. Samples of the coloured surfaces are available upon request.

Sensorial TONES


LIGHT - 40
NCS S 0510-Y10R
Light reflection: 71%




SUNRISE - 41
NCS S 0510-Y50R
Light reflection: 65%



FRESH - 42
NCS S 2005-B20G
Light reflection: 51%




BREEZE - 43
NCS S 1030-R80B
Light reflection: 45%



AQUA - 44
NCS S 1550-R80B
Light reflection: 25%



MISTY - 45
NCS S 1010-R40B
Light reflection: 60%



TWILIGHT - 46
NCS S 3010-R20B
Light reflection: 29%



energetic tones

CHILI - 50
NCS S 1580-Y90R
Light reflection: 12%



CURACAO - 51
NCS S 2555-B20G
Light reflection: 22%



VITAMIN - 52
NCS S 0585-Y20R
Light reflection: 46%



PRECIOUS TONES

COPPER - 60
NCS S 1030-Y60R
Light reflection: 34%



GOLD - 61
NCS S 3020-Y
Light reflection: 41%




MERCURY - 62
NCS S 2502-B
Light reflection: 44%




Sophisticated tones

GARNET - 70
NCS S 5030-Y90R
Light reflection: 12%



SCARLET - 71
NCS S 5040-Y90R
Light reflection: 8%



ERMINE - 72
NCS S 5030-B
Light reflection: 12%



EMERALD - 73
NCS S 6030-B30G
Light reflection: 7%



ACTIVATE YOUR CEILING

Rockfon® develop intelligent ceiling solutions which actively address a number of important issues in modern buildings and renovation projects.

Rockfon products are known for their design, aesthetics and ease of installation; coupled with the key performance features of superior fire resistance and acoustics.

This ensures that our ceiling solutions are among the highest performing, most cost effective and time efficient in today's interiors market.

The comprehensive ceiling solution portfolio from Rockfon ensures that our customers are able to actively add value to the construction process, by ultimately creating superior interior environments.

That is why we say "ACTIVATE YOUR CEILING".

All colour codes mentioned are based on the NCS - Natural Colour System® property of and used on licence from NCS Colour AB, Stockholm 2010.

Subject to alterations in range and product technology without prior notice. Rockfon accepts no responsibility for printing errors.

Rockfon

(Rockwool A/S)
Hovedgaden 501
DK-2640 Hedehusene
Denmark

Tlf: (+45) 46 56 85 45
Fax: (+45) 46 56 40 30
www.rockfon.com
export@rockfon.com

Local Rockfon dealer